

LD Panels

A lightweight roadway system for short-term use

Material	strand-cast aluminium
Dimensions (l × w × h)	20.00 × 3.00 × 0.02 m
Weight	approx. 1.340,00 kg per 20,00 m roll
Surface	lightly textured, pedestrian friendly
Accessories	PE foil, Geotextile, rubber mats
Transport	300,00 lfm (12 rolls) per truck (720.00 m ²)



Applications

LD Panels are primarily used for stable ground and light traffic. They are ideal for temporary access paths, roads, and parking lots. When used with a special rubberunderlay, they can be safely laid over sensitive surfaces, such as cobblestones or running tracks.

Features

LD Panels are bolted together lengthwise ensuring stability on loose surfaces. Their ultra-thin design minimizes trip hazards, and their slightly treaded surface prevents slipping, making LD Panels safe for pedestrian, wheelchair, bicycle, and forklift access. The panels are delivered in 20.00 m rolls and can be installed either by hand or with the help of a forklift.

Optional Extras

Upon request, we offer delivery, installation, and breakdown. We can either install panels in one configuration for the duration of your project or have a team on standby to reconfigure them as needed. We also offer PE foil to guard against water seepage or Geotextile for additional protection of the subsurface.



LD Panels


On-site applications



A LD panel transport road, AC/DC Black Ice World Tour, Melbourne, Australia



A temporary parking lot entrance built from LD panels

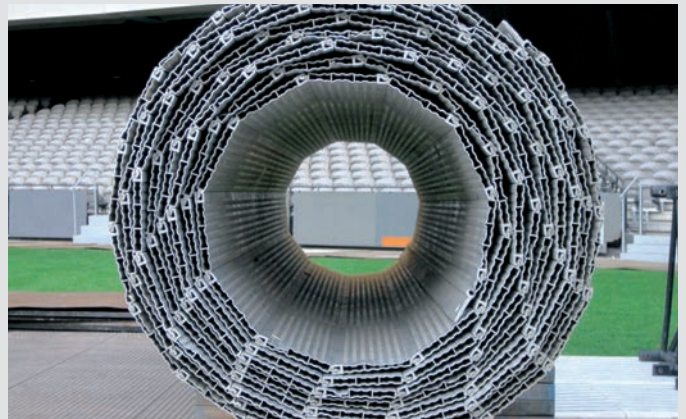

A roll of LD Panels awaiting installation



A temporary LD panel roadway



A construction site bypass road made of LD Panels

© eps